

SECTION VIEW


GENERAL NOTES:


- * MAXIMUM SURFACE LOADING RATE (SLR) INTO LOWER CHAMBER THROUGH DROP PIPE IS 1135 L/min/m² (27.9 gpm/ft²) FOR STORMCEPTOR EF4 AND 535 L/min/m² (13.1 gpm/ft²) FOR STORMCEPTOR EF04 (OIL CAPTURE CONFIGURATION). WEIR HEIGHT IS 150 mm (6 INCH) FOR EF04.
- ALL DIMENSIONS INDICATED ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SPECIFIED.
- STORMCEPTOR STRUCTURE INLET AND OUTLET PIPE SIZE AND ORIENTATION SHOWN FOR INFORMATIONAL PURPOSES ONLY.
- 3. UNLESS OTHERWISE NOTED, BYPASS INFRASTRUCTURE, SUCH AS ALL UPSTREAM DIVERSION STRUCTURES, CONNECTING STRUCTURES, OR PIPE CONDUITS CONNECTING TO COMPLETE THE STORMCEPTOR SYSTEM SHALL BE PROVIDED AND ADDRESSED SEPARATELY.
- DRAWING FOR INFORMATION PURPOSES ONLY. REFER TO ENGINEER'S SITE/UTILITY PLAN FOR STRUCTURE ORIENTATION.
- NO PRODUCT SUBSTITUTIONS SHALL BE ACCEPTED UNLESS SUBMITTED 10 DAYS PRIOR TO PROJECT BID DATE, OR AS DIRECTED BY THE ENGINEER OF RECORD.

INSTALLATION NOTES

- A. ANY SUB-BASE, BACKFILL DEPTH, AND/OR ANTI-FLOTATION PROVISIONS ARE SITE-SPECIFIC DESIGN CONSIDERATIONS AND SHALL BE SPECIFIED BY ENGINEER OF RECORD.
- B. CONTRACTOR TO PROVIDE EQUIPMENT WITH SUFFICIENT LIFTING AND REACH CAPACITY TO LIFT AND SET THE STRUCTURE (LIFTING CLUTCHES PROVIDED)
- C. CONTRACTOR WILL INSTALL AND LEVEL THE STRUCTURE, SEALING THE JOINTS, LINE ENTRY AND EXIT POINTS (NON-SHRINK GROUT WITH APPROVED WATERSTOP OR FLEXIBLE BOOT)
- D. CONTRACTOR TO TAKE APPROPRIATE MEASURES TO PROTECT THE DEVICE FROM CONSTRUCTION-RELATED EROSION RUNOFF.
- E. DEVICE ACTIVATION, BY CONTRACTOR, SHALL OCCUR ONLY AFTER SITE HAS BEEN STABILIZED AND THE STORMCEPTOR UNIT IS CLEAN AND FREE OF DERRIS

STANDARD DETAIL NOT FOR CONSTRUCTION

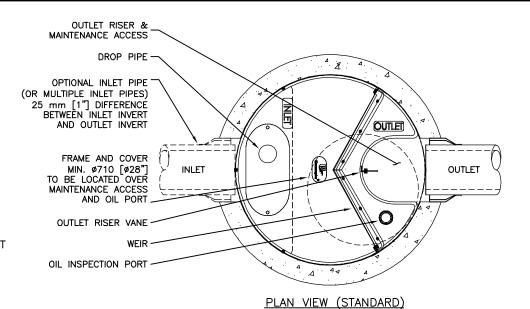

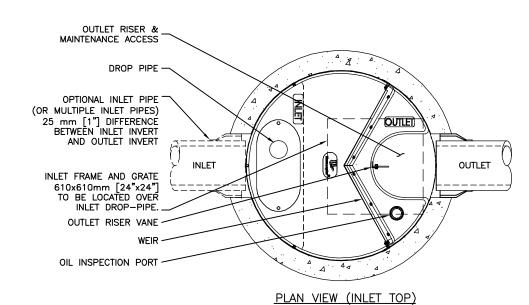

FOR SITE SPECIFIC DRAWINGS PLEASE CONTACT YOUR LOCAL STORMCEPTOR REPRESENTATIVE. SITE SPECIFIC DRAWINGS ARE BASED ON THE BEST AVAILABLE INFORMATION AT THE TIME. SOME FIELD REVISIONS TO THE SYSTEM LOCATION OR CONNECTION PIPING MAY BE NECESSARY BASED ON AVAILABLE SPACE OR SITE CONFIGURATION REVISIONS. ELEVATIONS SHOULD BE MAINTAINED EXCEPT WHERE NOTED ON BYPASS STRUCTURE (IF REQUIRED).

STORMCEPTOR MODEL

PEAK FLOW RATE (L/s)

DRAINAGE AREA (HA)

WATER QUALITY FLOW RATE (L/s)

PIPE DATA: | I.E. | MAT'L |

PER ENGINEER OF RECORD

RETURN PERIOD OF PEAK FLOW (yrs)

DRAINAGE AREA IMPERVIOUSNESS (%)

STRUCTURE ID

INLET #1

INLET #2

OUTLET

SITE SPECIFIC DATA REQUIREMENTS

DIA

SLOPE %

The deader are dispringed rebond rebond on the draw provided as a service to the project country. We have been deader by the project country. We have been deader by the marker of the there of the the policy without consent of landers in Fallanton so, is done at the same's own risk and information so, is done at the same's own risk and information so, is done at the same's own risk and information so. In the control of the country of the country of the deaders of the same of the country of the country of the deaders of the country of the country of the country of the the country of the country of the country of the country of the same of the country of the country of the country of the deaders of the country of the country of the country of the the country of the country of the country of the country of the the country of the country of the country of the country of the country of the country o				inaccurate information supplied by others.		
	####	####	####	JSK	JSK	ВУ
	####	####	####	UPDATES	INITIAL RELEASE	REVISION DESCRIPTION
	####	####	####	81/8/9	5/26/17	DATE
	####	####	####	1	0	MARK

wing is agineer ortum?). In may be without comply pressly se. In upon titions adiately no





*		SA 888-2 IN- COUNCE IN- COUNCE IN- COUNCE I INDEAN			
*	DATE: 5/26/2017				
HGL	DESIGNED:	DRAWN:			
*	JSK CHECKED:	JSK APPROVED:			
*	BSF	SP			
*	PROJECT No.: EF4	SEQUENCE No.:			
	SHEET:	or 1			